


NEW

VORTICEL MPC-E RANGE

Medium-pressure long cased axial fans

Suitable for application in commercial and industrial environments, such as warehouses, farm buildings, greenhouses and underground car parks, for extraction into a ventilation duct or directly outdoors.

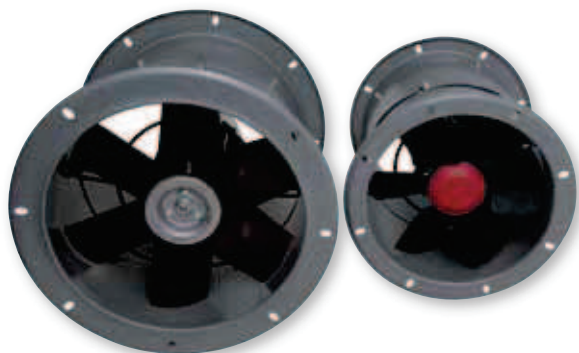

- **10 models: 5 single-phase and 5 three-phase.**
- Structure consists of two flanged parts, held together by screws, which allow connection to standardised pipes.
- Single-phase and three-phase induction motors with impellers with blade profile.
- Steel motor support protected by black epoxy polyester paint.
- Motors in class F.
- Wide range of continuous operation temperatures between -25°C and +70°C.
- Electric supply 230 V / 50 Hz for single-phase models and 400 V / 60 Hz for three-phase models.
- Protection rating: IP44.
- Insulation class: I.
- *Conforms to the requirements of the regulation N° 327/2011/UE (Lot 11, 1st Tier) set out by the EUP/ErP Directive, effective as of 01.01.2013.*

TECHNICAL DATA

	Models	Code	W min/max	A min/max	RPM min/max	Max Airflow		Max Pressure		Lp dB(A)* min/max	Lw dB(A)* min/max	Max °C
						m³/h min/max	l/s min/max	mmH₂O min/max	Pa min/max			
Single-phase	MPC-E 254 M	42263	70	0.32	1460	1180	328	9	82	25.03	45.08	70
	MPC-E 302 M	42209	380	1.93	2930	2860	794	60.09	597	53.01	73.06	70
	MPC-E 304 M	42210	110	0.5	1390	2160	600	10.1	99	34.8	55.3	70
	MPC-E 354 M	42217	200	0.95	1420	3500	972	14.2	139	41.7	62.2	70
	MPC-E 404 M	42228	313	1.5	1417	5000	1389	17	167	49.1	69.6	50
Three-phase	MPC-E 254 T	42359	60	0.21	1460	1210	336	8.02	80	25.03	45.08	70
	MPC-E 302 T	42309	397	1.15	2930	2900	805	62	608	53.1	73.06	70
	MPC-E 304 T	42310	107	0.24	1400	2250	625	10.4	102	34.8	55.3	70
	MPC-E 354 T	42317	198	0.42	1412	3770	1047	14.2	139	42.5	63	70
	MPC-E 404 T	42328	285	0.52	1345	5200	1444	14.9	146	49.4	69.9	70

* Sound pressure level measured at 3 m in free field conditions with long-cased appliance in delivery mode, in accordance with standard EN ISO 9614.

Electric supply: 230 V ~ 50 Hz.





ErP data

Directive 2009/125/EC ErP (Energy related Products)

	Models	Code	Measurement cat.	Efficiency cat.	Year of construction	Variable drive	BEP*					Spec. ratio <1.04	
							η	N.	(kW) Pe	m ³ /h q	Pa p		RPM
Three-phase Single-phase	MPC-E 302 M	42209	C	STATIC	01-01-13	NO	27.4	36.4	0.38	2064	180	2916	YES
	MPC-E 354 M	42217			01-01-13		25	36.0	0.19	2600	70	1417	
	MPC-E 404 M	42228			01-01-13		29	38.5	0.31	3735	87	1414	
	MPC-E 302 T	42309			01-01-13		27.4	36.3	0.4	2097	187	2913	
	MPC-E 354 T	42317			01-01-13		25.7	36.0	0.19	2600	70	1417	
	MPC-E 404 T	42328			01-01-13		27.3	37.1	0.28	3670	75	1337	

* Best efficiency point.










DIMENSIONS



Models	Ø A	Ø B	C	Ø D	E	F	G	H	Kg
MPC-E 254 M	319	264	300	292	14	9	4	45°	8.02
MPC-E 254 T									8.02
MPC-E 302 M	393	316	330	366	14	9	4	45°	12.03
MPC-E 302 T									12.3
MPC-E 304 M									10.2
MPC-E 304 T	432	368	330	405	14	9	4	45°	10.2
MPC-E 354 M									13.4
MPC-E 354 T	475	418	330	448	14	9	4	45°	13.4
MPC-E 404 M									14
MPC-E 404 T									14

Dimensions (mm)

PRODUCT ACCESSORIES

Models		Code	Product											
			MPC-E 254 M code 42263	MPC-E 302 M code 42209	MPC-E 304 M code 42210	MPC-E 354 M code 42217	MPC-E 404 M code 42228	MPC-E 254 T code 42359	MPC-E 302 T code 42309	MPC-E 304 T code 42310	MPC-E 354 T code 42317	MPC-E 404 T code 42328		
	IRM 30 Three-position single-phase speed controller	12921	●		●									●
	IRM 40 Three-position single-phase speed controller	12922		●		●	●							
	IRT 15 Three-position three-phase speed controller	12923							●		●	●	●	
	IRT 35 Three-phase voltage variator	12924								●				
	IREM 3 Single-phase speed controller	12931			●	●	●							
	IREM 5 Single-phase speed controller*	12932		●	●	●	●							
	IREM 9 Single-phase speed controller**	12933		●	●	●	●							
	MPC BO Ø 250 Suction connector	22535	●						●					
	MPC BO Ø 300 Suction connector	22536		●	●					●	●			
	MPC BO Ø 350 Suction connector	22537					●					●		
	MPC BO Ø 400 Suction connector	22538						●					●	
	MPC RA Ø 250 Flexible connector	22516	●						●					
	MPC RA Ø 300 Flexible connector	22517		●	●					●	●			
	MPC RA Ø 350 Flexible connector	22518					●					●		
	MPC RA Ø 400 Flexible connector	22519						●					●	
	MPC SU Ø 250 Mounting feet	22531	●						●					
	MPC SU Ø 300 Mounting feet	22532		●	●					●	●			
	MPC SU Ø 350 Mounting feet	22533					●					●		
	MPC SU Ø 400 Mounting feet	22534						●					●	
	MPC FL Ø 250 Coupling flange	22523	●						●					
	MPC FL Ø 300 Coupling flange	22524		●	●					●	●			
	MPC FL Ø 350 Coupling flange	22525					●					●		
	MPC FL Ø 400 Coupling flange	22526						●					●	
	MPC RP Ø 250 Protection grille	22527	●						●					
	MPC RP Ø 300 Protection grille	22528		●	●					●	●			
	MPC RP Ø 350 Protection grille	22529					●					●		
	MPC RP Ø 400 Protection grille	22530						●					●	

* Multiple regulation up to max 5 A


** Regulates several fans up to 9 A.

Description and sizes on page 150




PERFORMANCE CURVES


MPC-E 254 M

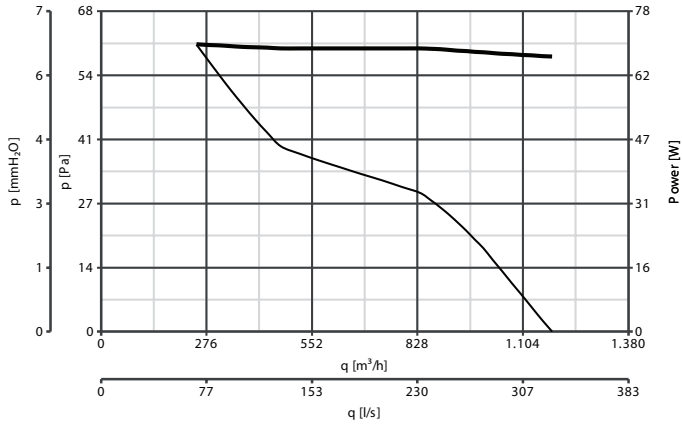


MPC-E 254 T

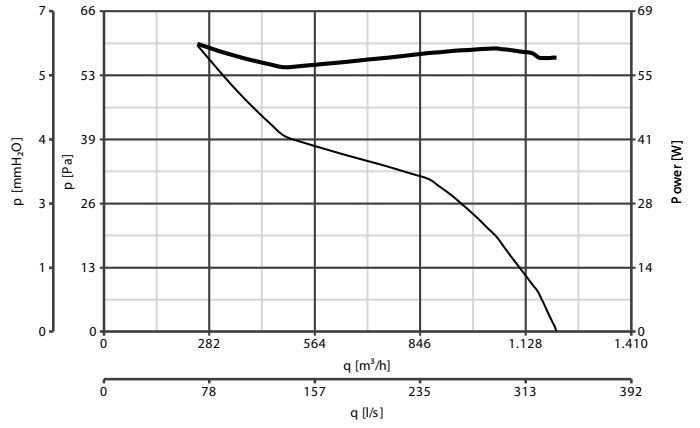


MPC-E 302 M

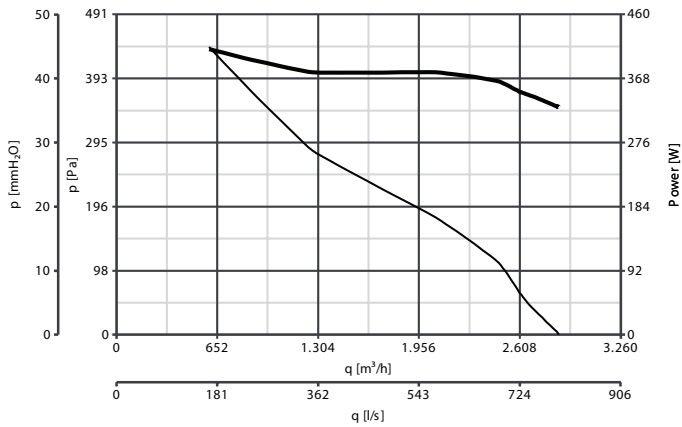


MPC-E 302 T

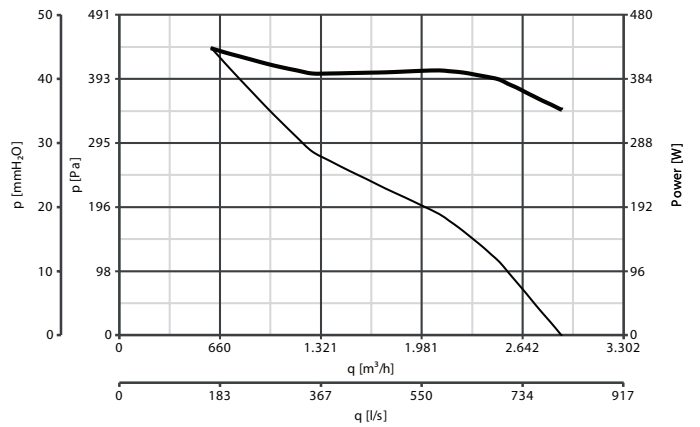


MPC-E 304 M

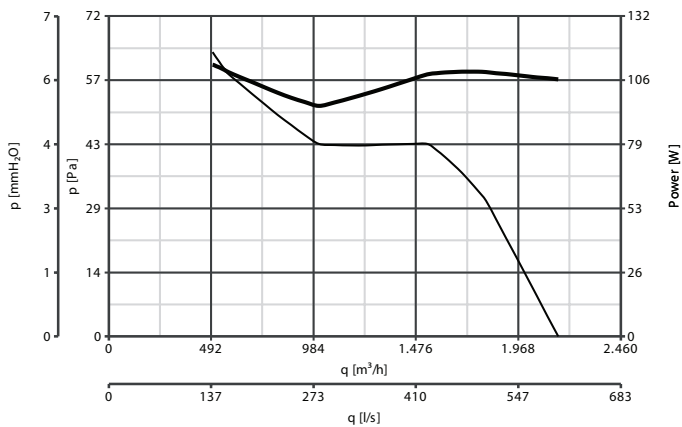


MPC-E 304 T

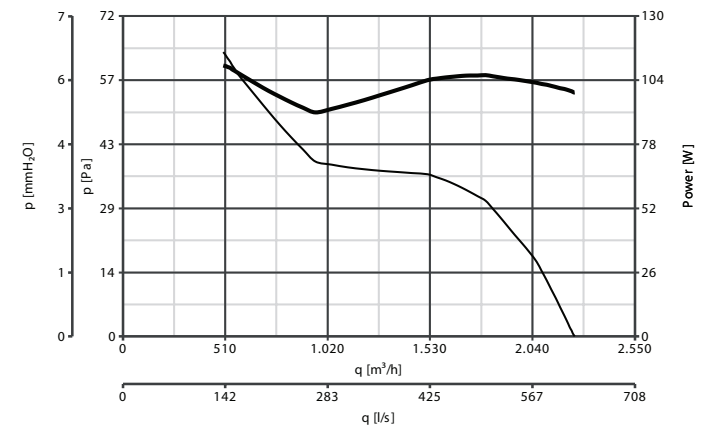


MPC-E 354 M

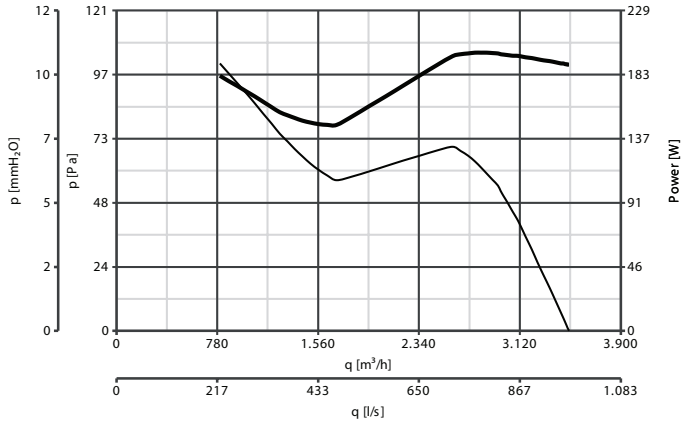


MPC-E 354 T

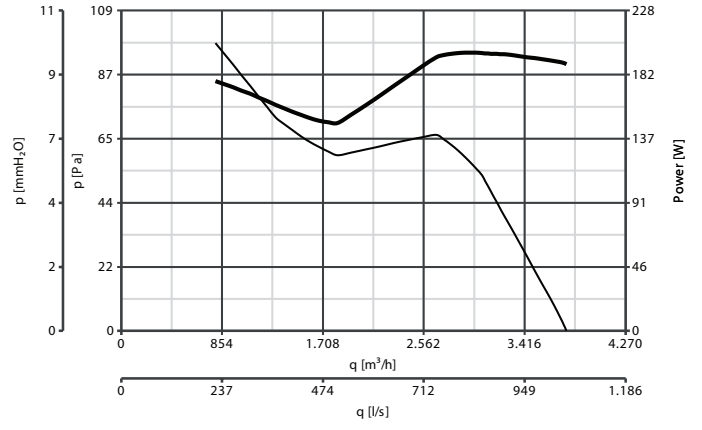

MPC-E 404 M

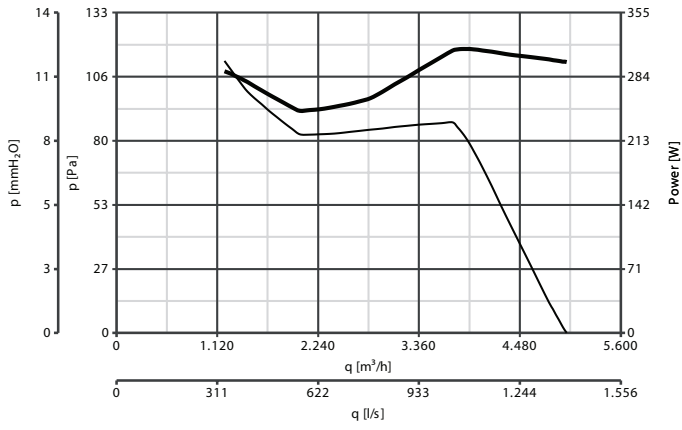

MPC-E 404 T

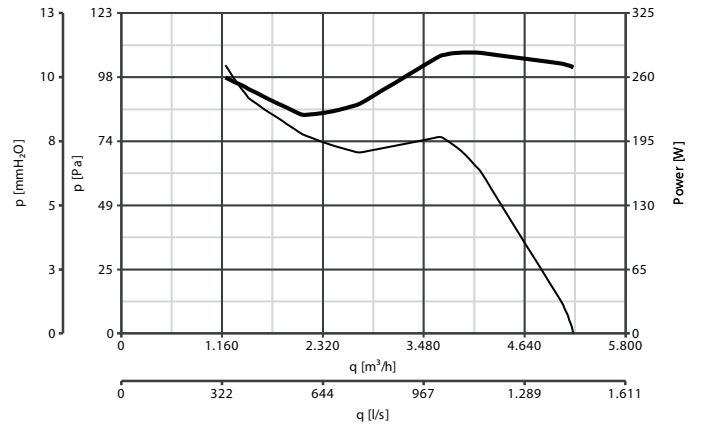

— min. — max.

