


- FRESH AIR VENTILATION
- HIGH ENERGY EFFICIENCY



## AIR-TO-AIR HEAT EXCHANGER

The units for heat recovery use the waste heat to condition the supply air. So the demand for the air conditioner can be decreased and the condition inside the room becomes better. At the same time the energy consumption for heating or cooling of the air can be reduced to up to 75%.

- 9 sizes with air-volume of 150 to 2000 m<sup>3</sup>/h available
- Recovery up to 75% of the energy of the waste air
- Increasing of the energy efficiency, particularly during the cold or hot season

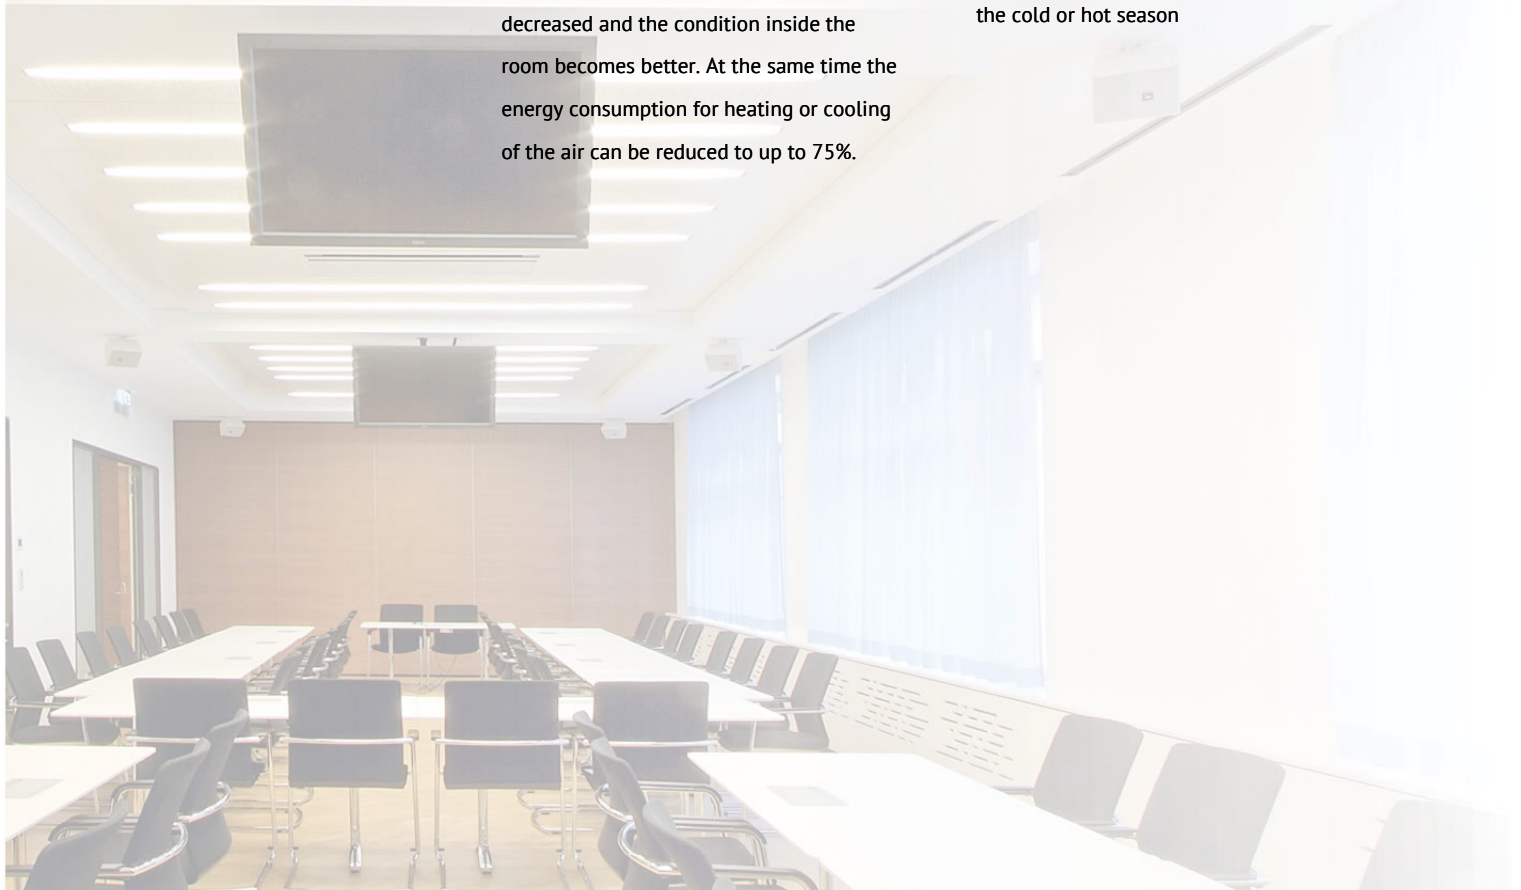

Indoor unit			
Power supply	V		230
Power consumption (cooling)	kW	•	1,15
Power consumption (heating)	kW	•	1,15
Dimensions (H/W/D)	mm		1189/1189/810
Air power	m <sup>3</sup> /h		2000
Sound pressure level (cooling)	db(A)	•	37/42,5
Pipe connections			250
Outdoor temperature (cooling)	°C	•	-15 - +43
Outdoor temperature (heating)	°C	•	-15 - +43

Toshiba sales partner: